




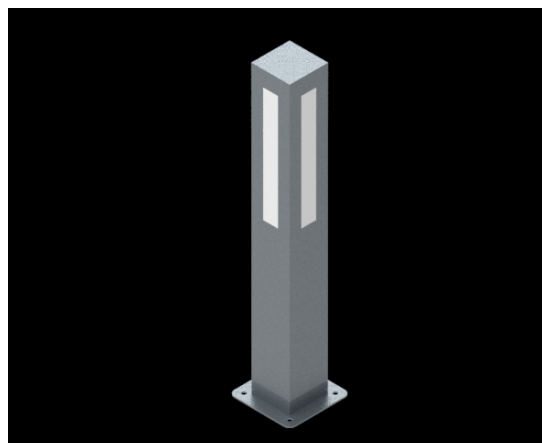


KUBIK POLE SOFT 100 LED



Dimensions/Abmessungen

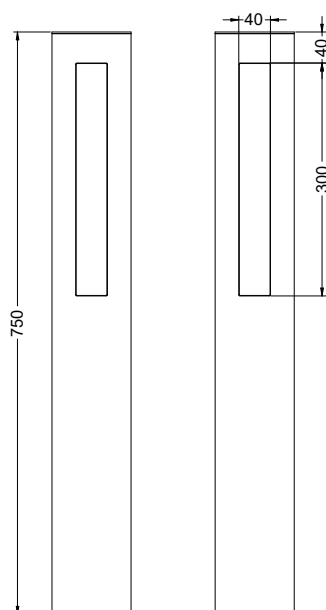


TYPE	PWM	Light bulb icon	Φ [lm]	kg	Color bar
KUBIK POLE SOFT 100 LED 1S	14 W	LED	1100	2,8	■
KUBIK POLE SOFT 100 LED 3S	21 W	LED	3300	2,8	■
KUBIK POLE SOFT 100 LED 4S	28 W	LED	4400	2,8	■


Available colour of the light / Erhältliche Lichtfarbe: 830/840

SDCM=3


Lifetime of LED sources / Lebensdauer LED – 60000 h (L80/B10)

Operating temperature range / Temperaturbereich der Leuchte im Betrieb:
-25° C – 30° CThe power shown refers to the whole system (tolerance +/- 10%).
Die Leistung bezieht sich auf das gesamte System (Toleranz +/- 10%).The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Der angegebene Lichtstrom betrifft die LED-Module (Toleranz +/- 10% abhängig von der Farbtemperatur).

KUBIK POLE SOFT 100 1S



KUBIK POLE SOFT 100 3S



KUBIK POLE SOFT 100 4S

Luminaire options / Leuchtenoptionen

Diffuser/Diffusoren/Diffuseurs:

PC	PC opal diffuser PC opal
PLX	PMMA opal diffuser PMMA opal

Control gear / Vorschaltgeräte:

E	driver Treiber
---	-------------------

WARNING!
Technical data may be changed. Photos of the luminaires may differ from reality. Last updated 7.12.2018. Other options of the luminaire available on request.

ACHTUNG!
Technische Daten können verändert werden. Abbildungen der Leuchten können von der Wirklichkeit abweichen. Die letzte Aktualisierung fand am 7.12.2018 statt. Andere Optionen der Leuchte sind nach Anfrage erhältlich.

Accessories/Zubehör

